


# Rissan® 430 grey

## HEAVY-DUTY WINDOW FLASHING SOLUTION

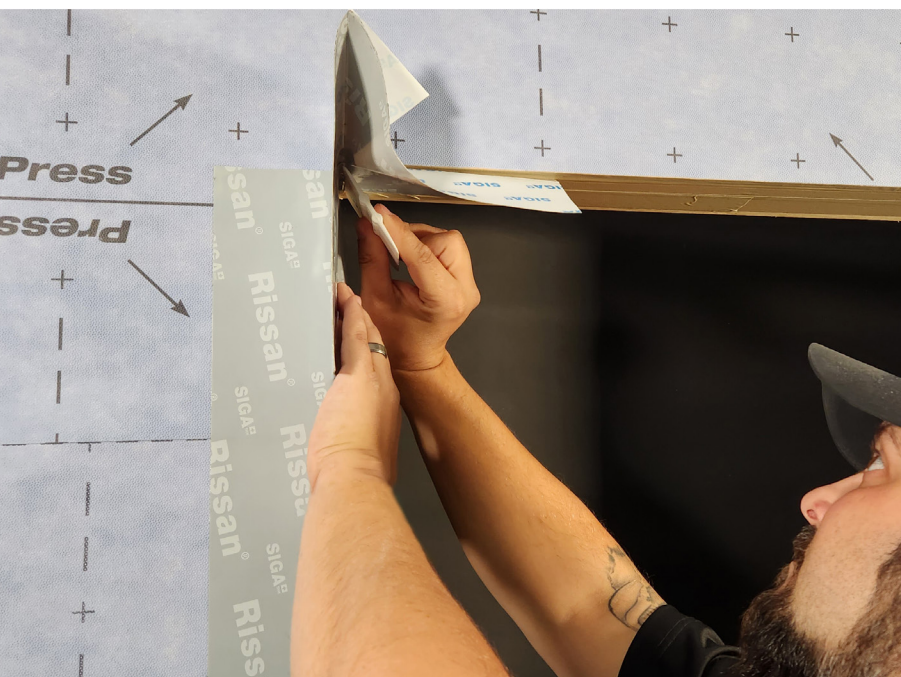

### Primerless, impermeable flashing solution for window rough opening applications

SIGA Rissan 430 grey is a robust, impermeable acrylic flashing tape. The dimensionally stable PE carrier is designed to withstand the rigorous demands of the commercial construction site while remaining formable and pliable, even in below freezing temperatures. Rissan 430 grey offers superior adhesion to cured concrete, metal, and wood.


#### CHARACTERISTICS

Available width(s)	6" / 9"
Roll length	82'
Water vapor transmission	< 0.1 US perms
Minimum surface contact for masonry substrate	2"


- ✓ extremely high adhesive strength on every surface
- ✓ primerless on concrete and masonry
- ✓ high puncture and abrasion resistant




# INSTALLATION INSTRUCTIONS

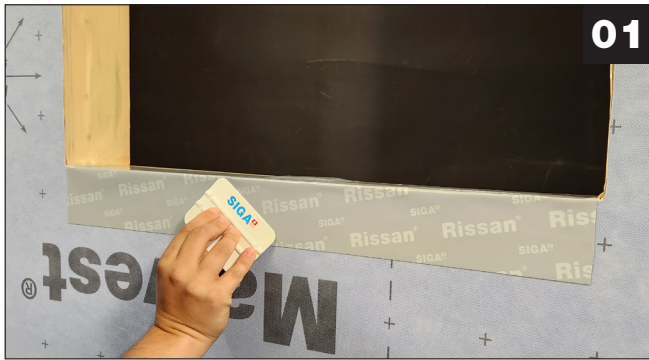

- Install Rissan 430 grey along sill pan flush to corners
- Utilizing the 3" release liner, apply Rissan 430 grey to field WRB along sill interface
- Remove second backing and press tightly using a squeegee

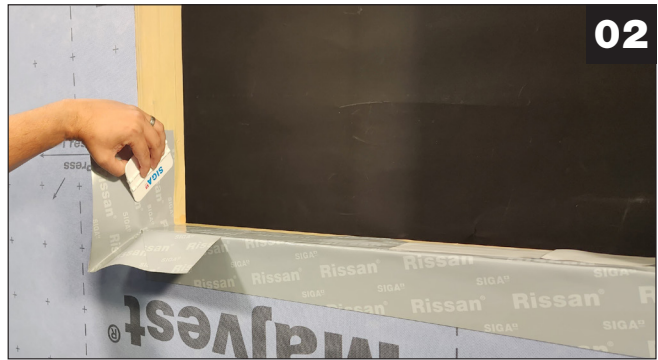


- Place pre-formed Rissan 430 grey corner gusset into inside corners
- Utilize a squeegee to place snug into corner

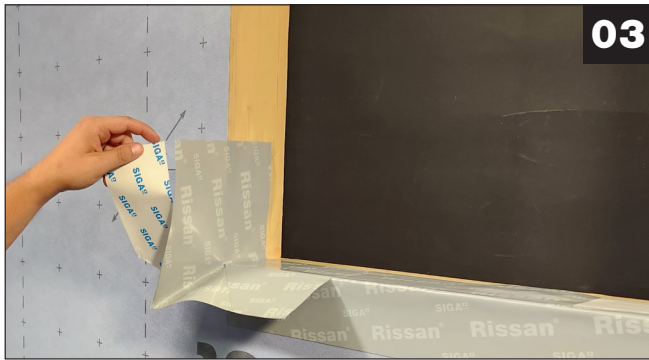

- Remove remaining backing paper, and pull corner gusset onto the face of the sheathing



- Install Rissan 430 grey along jambs, overlapping a minimum of 1" onto corner gusset
- Apply pressure using a squeegee

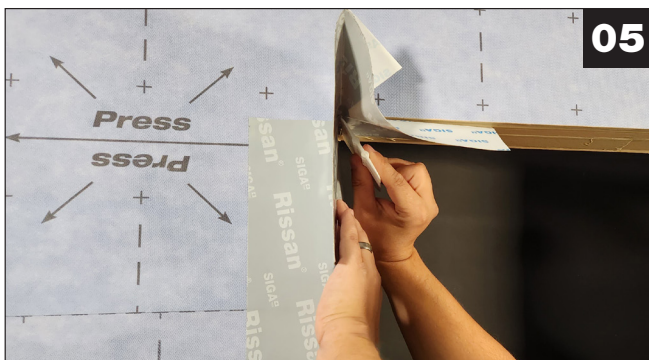

- Apply Rissan 430 grey corner gusset as shown in steps 2 & 3 into top corners
- Install head flashing, overlapping a minimum of 1"



- How it should look

All SIGA products are backed by a 10-Year Limited Warranty. Refer to [siga.swiss](https://www.siga.swiss) for complete details. We want you to maximize SIGA's performance potential on your project. Contact one of our Manufacturer Representatives for support, from architectural detail review to jobsite training for installers.